

# TeleEye

# DM882 / DM889

## Professional 36X Hi-resolution Day/Night Speed Dome




### Features

- Resolution: 480 (Day) / 550 (Night) TVL
- Powerful 432X zoom ; Optical: 36X, Digital: 12X
- Min. illumination: 0.01 Lux
- 220 presets, 4 patrols, 4 patterns
- 7 alarm inputs and 2 alarm outputs
- 8 function schedules
- 24 privacy zone maskings
- IP66 weather proof standard

### Dimensions

Unit: mm

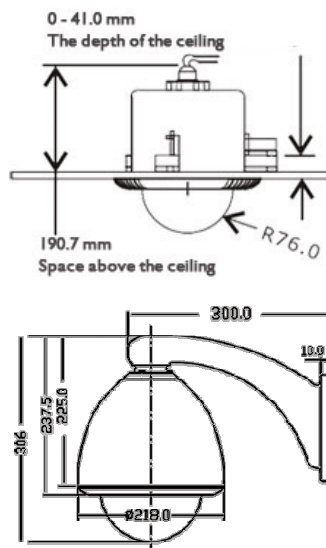

### Specifications

MODEL	DM882	DM889
PICK UP DEVICE	1/4" Sony CCD	
TOTAL PIXELS	PAL: 752 ( H ) x 582 ( V ) NTSC: 768 ( H ) x 494 ( V )	
HORIZONTAL RESOLUTION	Day: 480 TVL Night: 550 TVL	
LENS	3.4 – 122.4mm	
VIEW ANGLE ( HORIZONTAL )	1.7° - 57.8°	
MIN. ILLUMINATION	Day: 0.1 Lux / F1.6 Night: 0.01 Lux / F1.6	
ELECTRONIC SHUTTER	1/4 - 1/10,000 sec	
IRIS	Auto / Manual	
BACK LIGHT COMPENSATION	On / Off Switchable	
S / N RATIO	More than 50dB ( AGC OFF )	
WHITE BALANCE	Auto / Manual	
VIDEO OUTPUT CONNECTOR	1.0Vp-p ( 75Ω , Composite )	
AUTO GAIN CONTROL	Yes	
OSD MENU	Yes	
POWER SOURCE	24V AC / 30W ( Max )	24V AC / 50W ( Max )
OPERATING TEMPERATURE	-10°C ~ 50°C	-40°C ~ 60°C
WEATHER PROOF STANDARD	-	IP66
HUMIDITY	0% - 95% ( No Condensation )	
NET WEIGHT ( KG )	5	5.32

www.TeleEye.com

### TeleEye Group

China Croatia Hong Kong Macau Mauritius  
Philippines Singapore South Africa Sri Lanka U.K.

DISTRIBUTED BY:

Design and specifications are subject to change without prior notice. Copyright © 2011 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.

Printed: 2011.08